



**Seima Chrome 40mm Bottle Trap  
SVA-001**



ref:	DS-SVA-001
issue:	1.3.1
date:	Jul 2009

# Seima Bottle Trap, 40mm, chrome

# SVA-001

## Specification, fitting and cleaning instructions

A stylish bottle trap with smooth lines and chrome polished finish that will complement any installation requiring an exposed trap. Suitable for wall or optional floor exit. Removable inspection port at base of bottle trap provides simple access to trap body.

Suitable for connection to 32 or 40mm plug & waste (chrome adaptor is included for connection to 32mm plug & waste). Simple outlet connection using rubber seal into 40mm DWV female socket.

This unit is suitable for general purpose applications.

**Part no:** SVA-001 bottle trap, 40mm chrome, wall exit  
includes adaptor, 32/40mm chrome (p/n SVA-002)  
SVA-001-FEP floor exit pipe (optional)

**Waste outlet:** Suitable for use with 32 or 40mm wastes. Use enclosed 32/40mm adaptor for connection to a 32mm plug & waste.

**Fixing:** Ensure all o-rings are lubricated with silicone based lubricant.  
Fit connection pipe to plug & washer. Adjust trap height (trim connection pipe as required) to line up with wall outlet pipe and ensure there is a minimum 1.5 degree fall in the outlet pipe when installed.

Measure and trim outlet pipe, ensuring there is adequate allowance for pipe and rubber seal to fit into DWV female socket.

Fit rubber seal over outlet pipe and fit into 40mm DWV female socket.

Fit protective cover over outlet pipe prior to final connection to plumbing.



Firmly tighten all joints. Do not over tighten. Test for leaks.

**Cleaning:** Clean with soapy water. Do not use corrosive or abrasive cleaners.

**Material:** Brass alloy, chrome finish.

**Approvals:** Watermark AS1589, Certificate No. 23010

**Dimensions:** All dimensions in millimetres and subject to normal manufacturing variation. Specifications may vary without notice as part of our continuous improvement policy.

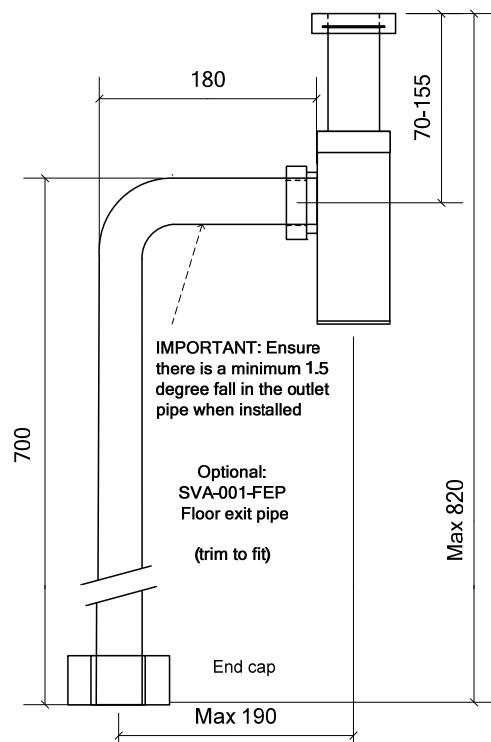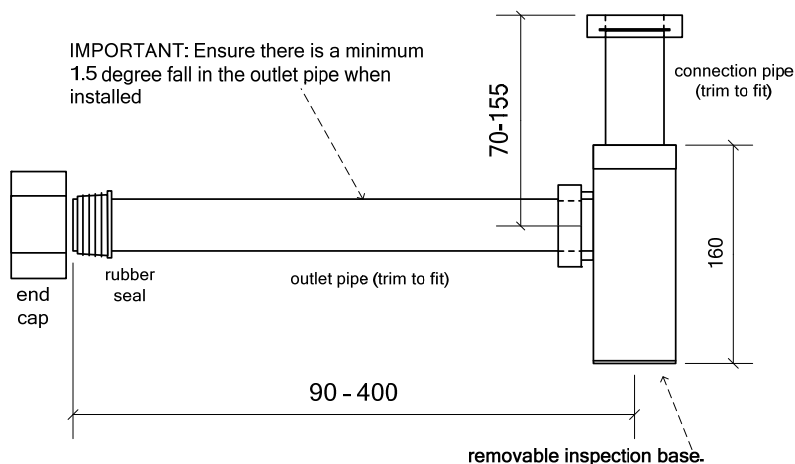

**MUST BE FITTED BY LICENCED PLUMBER.**

**Warranty does NOT cover any fault caused by installation or part installation by an unlicensed person.**



ref: DS-SVA-001  
issue: 1.3.1  
date: Jul 2009